

BOS
Best Of Steel

General Catalogue 01/18
CONTAINERS AND WAREHOUSES

NEW EDITION



FROM THE MARKET LEADER!

THE COMPANY

Versatile storage space in steel

As the market leader, BOS Best Of Steel is continually working on improving solid material storage which is easy to transport. It can quickly be put into use and can be extended at any time because of the modular construction. A storage solution with sturdy all-round protection and an outstanding cost-benefit ratio. Our claim: we always offer the simplest and most suitable solution for all sorts of different applications.

The **BOS Quick-Build-Container** is at home on building sites: extremely quickly assembled, robust and available in many different sizes. The classic in the sector of mobile storage rooms.

For larger storage requirements we have developed the **BOS Quick-Build-Warehouse** – a solid and complete solution, no foundation required and easy to construct.

All this in proven BOS quality with TÜV certified safety and with the advantages that only steel can offer.



Certified products provide trust and safety



CONTENTS

CONTAINERS

Quick-Build-Containers

➤ Product advantages	4
➤ Quick-Build-Container SC3000	6
➤ Quick-Build-Container SC3000 – Door systems	8
➤ Storage Container SC10 / SC20 / SC40	10
➤ Quick-Build-Container SC3000 Custom-Made	12
➤ Thermo Container ISO3000	14
➤ Container Combination SCC / SCC2400	16
➤ Engineer's Shelter BPH	18
➤ Shelter US10 / US20	20
➤ Mobile Box MB1 / MB2	22
➤ Tool Security Box WSB	24
➤ Gas Cylinder Container SGL	26

WAREHOUSES

Quick-Build-Warehouses

➤ Product advantages	28
➤ At a glance	30
➤ Quick-Build-Warehouse SBH2600	32
➤ Quick-Build-Warehouse SBH3000	34
➤ Quick-Build-Warehouse SBH4000	36
➤ Quick-Build-Warehouse SBH4800	38

APPLICATIONS / ACCESSORIES

Fields of application / References

➤ Building Sites	40
➤ Housing	41
➤ Storage Space for industry, crafts and trade	42
➤ Tyre Storage	42
➤ Self Storage	43
➤ Storage Management for construction, industry and trade	43

Accessories / Options

➤ Tidiness and security	44
➤ Comfort	45

CONTAINERS

WAREHOUSES

APPLICATIONS / ACCESSORIES

Quick-Build-Containers





The proven standard for construction, industry and trade.

PRODUCT ADVANTAGES

- Sturdy, robust, durable and resistant
- Highest industrial safety, certified by TÜV and GS mark
- Protection from burglary and theft via profile cylinder lock and solid shoot bolt
- 4 jack rings for easy on-site transportation
- Self assembly option (simple construction kit with detailed instructions)



TOOL-FREE
ASSEMBLY
simple and quick



Quick-Build-Container SC3000



Experience containers in 360°

THE CLASSIC
NO. 1 WORLDWIDE



**TOOL-FREE
ASSEMBLY**
simple and quick



**ASSEMBLY /
DISASSEMBLY**
in 5 minutes

SITUATION:

You are searching for a **universally usable** container for every application, on small building sites as well as for industry and crafts: flexible, mobile and yet sturdy and built in lightening speed.

SOLUTION: Quick-Build-Container SC3000






- 4 jack rings for easy on-site transportation, up to 3 tons can be lifted by crane
- Metal runners for forklift transport and for ground ventilation
- Snow load safety 210kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- Tool-free assembly, simple and quick – with 2 people in just 5 minutes (example 3x2m)

Delivery:

- Flat-packed
- Assembled

Assembly video:



	Door arrangements: <small>(Details see page 8 – 9)</small>					
		 In side wall, single door: 1150x1890mm	 In front face, single door: 1150x1890mm	 In front face, double door: 1950x1890mm	 In front face, double door: 1550x1890mm	
SC3000	1x2	2x2	3x2	4x2	5x2	6x2
Width external/internal (mm)	2100 / 1975	2100 / 1975	2100 / 1975	2100 / 1975	2100 / 1975	2100 / 1975
Depth external/internal (mm)	1100 / 975	2100 / 1975	3100 / 2975	4100 / 3975	5100 / 4975	6100 / 5975
Height external/internal (mm)	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935
Weight (kg)	200	290	350	450	600	700
in stock						

All containers are also available without flooring for level access.





All containers can also be supplied in a height of 2400mm (see SC3000 Custom-Made page 12).

ACCESSORIES/OPTIONS:

- 1
2
3
4
5
6
7
- 8
9
10
11
12
13
- without without
GS GS

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Storage Space (➔ Page 42)
-  Self Storage (➔ Page 43)
-  Storage Management (➔ Page 43)

Quick-Build-Container

Door systems



Illustration: SC3000 with optional paint finish

CHOICE OF DOOR SYSTEM:

There are four different door systems available for the SC3000. The versions SZ, SZS and SE are mounted in the front face, the version LE is integrated in the side wall. **New in the programme: SZS.** Due to the narrower 2 wing door, all four corners of the container can be equipped with BOS protective corner covers. These offer increased stability and security, especially for the tough 'everyday life' on construction sites.



SZ

- In front face
- Double door
- 1950x1890mm
- Optional: 2 protective corner covers



SZS


- In front face
- Double door, narrow
- 1550x1890mm
- Optional: 4 protective corner covers

NEW
EXTRA
STURDY



SE

- In front face
- Single door
- 1150x1890mm
- Optional: 4 protective corner covers



LE

- In side wall
- Single door
- 1150x1890mm
- Optional: 4 protective corner covers



Protective corner covers (optional)

These provide additional protection against theft and collision as well as increased stability.



Storage Container SC10 / SC20 / SC40



THE BETTER ALTERNATIVE
TO A SEA CONTAINER



TOOL-FREE
ASSEMBLY
simple and quick



ASSEMBLY /
DISASSEMBLY
in 10 minutes

SITUATION:

A large, inexpensive storage space is required for industry, crafts and trade as a better alternative to a sea container- robust and movable when necessary.

SOLUTION: Storage Container SC10 / SC20 / SC40


- 4 jack rings for easy transportation, up to 3 tons can be lifted by crane (SC10 / SC20)
- Metal runners for forklift transport (SC10 / SC20) and for ground ventilation
- Snow load safety 135kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- Tool-free assembly, simple and quick – with 2 people in just 10 minutes (example SC10)
- Protective corner covers for additional stability

Delivery:

- Flat-packed
- Assembled (SC10 and SC20)



Assembly video:


	Door arrangements:		
	SE In front face, single door: 1150x2235mm	SZ In front face, double door: 1750x2235mm	
 (SC10 / SC20)			
SC	10	20	40 (= 2xSC20, joined)
Width external/internal (mm)	2300 / 2175	2300 / 2175	2300 / 2175
Depth external/internal (mm)	3100 / 2975	6100 / 5975	12200 / 12075
Height external/internal (mm)	2445 / 2280	2445 / 2280	2445 / 2280
Height lower edge of roof in coupling section (mm)	–	–	2220
Weight (kg)	450	800	1200

ACCESSORIES/OPTIONS:

- 1 2 3 4 5 6
7 9 10 11 12 13
without without
GS GS

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Storage Space (➔ Page 42)
-  Tyre Storage (➔ Page 42)
-  Self Storage (➔ Page 43)
-  Storage Management (➔ Page 43)

Quick-Build-Container SC3000 Custom-Made



CUSTOM-MADE

SITUATION:

You need an **individual container** for your **specific needs**, for example with particular dimensions or equipment requirements for special purposes.

SOLUTION: Quick-Build-Container SC3000 Custom-Made

We are happy to manufacture our standard containers according to your requirements.

Non-standard sizes are available in steps of +/- 200mm in depth and width.

The door arrangement is individually possible in the front and side walls.

Do you have a particular wish? Let us know!

Assembly video:



		SE	SZ	LE	LZ
Door arrangements:					
SC3000 Custom-Made					
Width	(mm)	700 to 3100			
Depth	(mm)	700 to 6100			
Height	(mm)	1600 / 2100 / 2400 / 2600			

All containers are also available without flooring for level access.



Balcony containers provide extra space where housing is confined



Slim design container



Can be lifted by crane on building sites



Custom-made container with ventilation apertures

ACCESSORIES/OPTIONS:



→ See page 44 – 45 for details.

FIELDS OF APPLICATION:

	Building Sites	(→ Page 40)
	Housing	(→ Page 41)
	Storage Space	(→ Page 42)
	Tyre Storage	(→ Page 42)
	Self Storage	(→ Page 43)
	Storage Management	(→ Page 43)

Thermo Container ISO3000



SITUATION:


What is needed is a **storage container** for temperature-sensitive goods, for drinks and interim storage, for the storage of household goods and furniture, for storing documents/archiving, as a building site container or for the self storage industry.

SOLUTION: Thermo Container ISO3000

- 40mm EPS insulation in walls and roof, hidden behind 0.8mm galvanized fine sheet
- Insulated door with high quality profile seal
- Snow load safety 150kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- Insulated flooring as an option
- High anti-theft protection via profile cylinder lock with solid shoot bolts
- 4 jack rings for easy transportation

Delivery:

- Assembled

	 In front face, double door: 1750x2235mm				
ISO3000	2x2	3x2	4x2	5x2	6x2
Width external/internal (mm)	2100 / 1885	2100 / 1885	2100 / 1885	2100 / 1885	2100 / 1885
Depth external/internal (mm)	2100 / 1835	3100 / 2835	4100 / 3835	5100 / 4835	6100 / 5835
Height external/internal (mm)	2425 / 2240	2425 / 2240	2425 / 2240	2425 / 2240	2425 / 2240
Height external/internal with insulated flooring (mm)	2425 / 2200	2425 / 2200	2425 / 2200	2425 / 2200	2425 / 2200
Weight (kg)	435	590	745	900	1055



Frost monitor





ACCESSORIES/OPTIONS:

6 **8** **9** **10** **11**

- Frost monitor

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (→ Page 40)
-  Storage Space (→ Page 42)
-  Self Storage (→ Page 43)
-  Storage Management (→ Page 43)

Container Combination

SCC / SCC2400



SPACE MIRACLE

SITUATION:



Your space requirement is up to 30m², making it too much for a normal container. At the same time you want a low-cost and movable at anytime storage concept with a high cost-benefit ratio.



SOLUTION: Container Combination SCC / SCC2400

- Stable and rigid construction, based on the Quick-Build-Container SC3000
- Metal runners for ground ventilation
- Snow load safety up to 200kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- The assembly is as for the Quick-Build-Container – simple and fast

Delivery:

- Flat-packed

	Door arrangements:					
	LE  In side wall, single door: 1150x1890mm			LZ  In side wall, double door: 1950x1890mm		
SCC	3x4	3x6	4x4	4x6	5x4	5x6
Width external/internal (mm)	4200 / 4075	6300 / 6175	4200 / 4075	6300 / 6175	4330 / 4205	6560 / 6435
Depth external/internal (mm)	3100 / 2975	3100 / 2975	4100 / 3975	4100 / 3975	5100 / 4975	5100 / 4975
Height external/internal (mm)	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935	2315 / 1935	2315 / 1935
Height lower edge of roof in coupling section (mm)	1775	1775	1705	1705	1875	1875
Weight (kg)	675	950	825	1175	1125	1650

	Door arrangements:					
	LE  In side wall, single door: 1150x2230mm			LZ  In side wall, double door: 1150x2230mm		
NEW: SCC2400	3x4	3x6	4x4	4x6	5x4	5x6
Width external/internal (mm)	4200 / 4075	6300 / 6175	4200 / 4075	6300 / 6175	4330 / 4205	6560 / 6435
Depth external/internal (mm)	3100 / 2975	3100 / 2975	4100 / 3975	4100 / 3975	5100 / 4975	5100 / 4975
Height external/internal (mm)	2445 / 2280	2445 / 2280	2445 / 2280	2445 / 2280	2660 / 2280	2660 / 2280
Height lower edge of roof in coupling section (mm)	2120	2120	2050	2050	2220	2220
Weight (kg)	720	1015	885	1250	1185	1725





All containers are also available without flooring for level access.

ACCESSORIES/OPTIONS:

- 1 2 3 4 5 6 7
8 9 10 11 12 13

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Storage Space (➔ Page 42)
-  Self Storage (➔ Page 43)
-  Storage Management (➔ Page 43)

Engineer's Shelter

BPH



SITUATION:


You are looking for a mini-office on the building site for architects and site managers which is a safe storage place for plans and drawings at the same time.

SOLUTION: Engineer's Shelter BPH

- A door catch prevents the door from slamming
- 4 jack rings for easy transportation
- Forklift pockets for transport and for ground ventilation
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- Protective corner covers for additional stability

Delivery:

- Assembled

		 Door arrangement: Roof overhang: 1x2m, double door: 1950x1890mm
BPH		
Width external/internal (mm)		2100 / 1975
Depth external/internal (mm)		1100 / 975 (2100mm incl. roof overhang)
Height external/internal (mm)		2080 / 1935
Weight (kg)		250



Drawing board with 1 shelf



Drawing shelf



Light panel in the roof

ACCESSORIES/OPTIONS:

5 **6** **7** **9** **10** **11**

- Drawing board with 1 shelf
- Drawing shelf
- Light panel in the roof

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

Building Sites

(➔ Page 40)

Shelter

US10 / US20



**WEATHER
PROTECTION**

SITUATION:

What is wanted is a shelter that **protects against wind and weather** while being **freely accessible**. It should be practical and generously sized and suitable for the storage of materials, equipment, vehicles or as a shelter for people and animals.

SOLUTION: Shelter US10 / US20

- Floor-level, threshold-free access
- Snow load safety 125kg/m²
- Ground fastening with ground nails
- Ground fastening with dowels on foundation as option
- Assembly simple and fast without special tools
- Protective corner covers for additional stability

Delivery:

- Flat-packed

US		10	20
Width external/internal	(mm)	2300 / 2175	2300 / 2175
Depth external/internal	(mm)	3100 / 2975	6100 / 5975
Height external/internal	(mm)	2380 / 2340	2380 / 2340
Entrance height (supports)	(mm)	2140	2140
Weight	(kg)	350	520

US20 as a shelter for bicycles



US20 as a combi-shelter for waste containers and bicycles



US20 for housing wire mesh crates – quicker access with forklift or pallet trucks



US20 as a shelter for bicycles

ACCESSORIES/OPTIONS:

1 **2** **3** **4** **7** **9** **11**

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Housing (➔ Page 41)
-  Storage Space (➔ Page 42)
-  Storage Management (➔ Page 42)

Mobile Box MB1 / MB2



**MOBILE
STORAGE**

SITUATION:




What is needed is a lockable, mobile storage cupboard or tool trolley which provides weather, material and theft protection- in particular on large building sites with several floors, but also in workshops and factories. For daily use it must be especially robust and secure.

SOLUTION: Mobile Box MB1 / MB2

- 4 jack rings as standard. MB1 – up to 300kg can be lifted by crane, MB2 – up to 600kg
- Metal runners for safe forklift transport and for ground ventilation
- Protective corner covers for additional stability
- Snow load safety 210kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²

Delivery:

- Assembled

	Door arrangements:	
	 Single door, 950x1390mm	 Double door, 1950x1390mm
MB	1	2
Width external/internal (mm)	1100 / 975	2100 / 1975
Depth external/internal (mm)	700 / 575	700 / 575
Height external/internal (mm)	1600 / 1435	1600 / 1435
Height with castors external/internal (mm)	1795 / 1435	1795 / 1435
Weight (kg)	145	220



Swivel and fixed castors

ACCESSORIES/OPTIONS:





1
2
3
4
5
6
7
9
11

(for MB2)

- Swivel and fixed castors

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (→ Page 40)
-  Storage Space (→ Page 42)
-  Self Storage (→ Page 43)
-  Storage Management (→ Page 43)

Tool Security Box

WSB



THE SAFE

SITUATION:

For the **safe storage** of personal tools, small appliances and general equipment, a storage facility is needed which can be used on lorries, vans, trailers, flatbed vehicles or directly on the building site. A high level of theft, weather and material protection as well as simple loading are essential requirements.

SOLUTION: Tool Security Box WSB

- As a 'safe' for valuable tools and appliances
- Can be firmly attached to the vehicle
- Gas struts prevent slamming of the lid
- Transport of the box:
 - manual (4 handles)
 - forklift truck (forklift pockets, also for ventilation)
 - crane (4 jack rings, up to 250kg)
- Protective corner covers for additional stability
- Snow load safety 210kg/m²
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²

Delivery:

- Assembled

WSB		
Width external/internal	(mm)	1900 / 1770
Depth external/internal	(mm)	700 / 570
Height external/internal	(mm)	875 / 750
Weight	(kg)	95





2 optional discus locks

Typical on a building site:
a WSB on a utility vehicle**ACCESSORIES/OPTIONS:****9**

- 2 discus locks

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Storage Management (➔ Page 43)

Gas Cylinder Container SGL



**PARTICULAR
SAFETY**

SITUATION:






An economical and safe storage solution is required for the legally compliant storage of gas cylinders.

SOLUTION: Gas Cylinder Container SGL

- Holding brackets and straps protect the gas cylinders from falling over
- 4 jack rings for easy transportation
- Metal runners for safe forklift transport and for ground ventilation
- Snow load safety 210kg/m²
- Grate floor
- Floor load bearing capacity 500kg/m²

Delivery:

- Assembled

Corresponds to TRGS 510 (Technical Rules for Compressed Gases)		SE	SZ	SZ	LE/LE	LZ/LZ
		 1x single door: 1305x1890mm	 1x double door: 1950x1890mm	 1x double door: 1950x1890mm	 2x single door: 1305x1890mm	 2x double door: 1750x1890mm
Door arrangements:						
SGL		1.5x1.5	1x2	2x2	3x2	4x2
Width external/internal	(mm)	1500 / 1375	2100 / 1975	2100 / 1975	2100 / 1975	2100 / 1975
Depth external/internal	(mm)	1500 / 1375	1100 / 975	2100 / 1975	3100 / 2975	4100 / 3975
Height external/internal	(mm)	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935	2100 / 1935
Storage capacity	(Amount)					
• 5kg (230mm)		32	32	75	104	149
• 11kg (300mm)		18	18	42	58	90
• 33kg (320mm)		16	18	39	60	81
• 50kg (230mm)		32	32	75	104	149
Weight	(kg)	200	210	330	450	570


All Gas Cylinder Containers are also available without flooring for level access.

ACCESSORIES/OPTIONS:

8 **9** **10** **11**

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

 Storage Management (➔ Page 42)

Quick-Build-Warehouses





PRODUCT ADVANTAGES

- Simple assembly in a very short time
- No expensive foundation necessary
- Expandable at any time
- Demountable at any time for relocation
- Verifiable structural analysis according to Eurocode 3



ASSEMBLY IN JUST
A FEW HOURS
quick & easy



DIN EN1090-1:2012
REG.-NR. 0114502



Quick-Build-Warehouses

At a glance

The right warehouse for every area of application

SBH2600


Height 2.60m



- Width: 3 to 7m
- Length: 4 to 30m

SBH3000

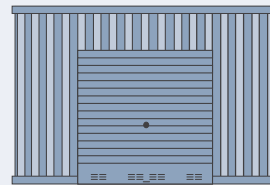
Height 3.00m



- Width: 4 to 7m
- Length: 4 to 30m

SBH4000

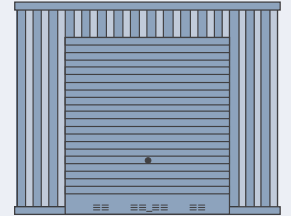
Height 4.00m



- Width: 4 to 7m
- Length: 4 to 30m

SBH4800

Height 4.80m



- Width: 4 to 7m
- Length: 4 to 30m

The gate and door arrangements shown are examples only.

Assembly



Simply build it yourself ...

Save money by assembling your new warehouse yourself.

We help by providing detailed and illustrated assembly instructions and exact, prefabricated parts.



... or have it built!

The assembly of a Quick-Build-Warehouse SHB 3000-7x14m requires four people and one working day. If you don't have the time to build it yourself, our assembly team can set up your new warehouse quickly and professionally for you. All for a fixed price!



Individual expansion

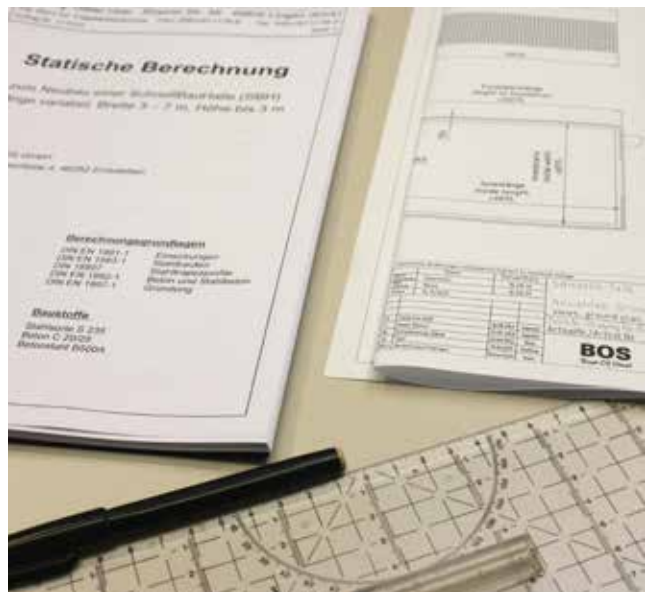
Your business should expand in the future. However, you don't know yet when and to what extent. Not an issue with the flexible Quick-Build-Warehouses.

The modular system can be adapted to your increasing storage needs.



Ground anchorage with ground nails or dowels

- Ground anchorage with dowels on foundation (SBH3000, 4000, 4800)
- Alternatively, cost-effective ground anchorage with ground nails (SBH3000)



Planning permission and the necessary forms

You receive a verifiable structural analysis according to Eurocode 3 as well as view drawings with foundation plan.

Quick-Build-Warehouse SBH2600

Height 2.6m



THE CLASSIC
WITHOUT FOUNDATION



ASSEMBLY IN JUST
A FEW HOURS
quick & easy



DIN EN1090-1:2012
REG.-NR. 0114502




SITUATION:

What is needed is a **cost-effective and flexible** warehouse, that can be set up **without a foundation** and expanded at any time.

SOLUTION: Quick-Build-Warehouse SBH2600

- Can be extended in length at any time in modular 2.1m steps
- Verifiable structural analysis according to Eurocode 3 included
- Sturdy OSB wooden flooring
- Floor load bearing capacity 500kg/m²
- Snow load safety of up to 400kg/m² depending on warehouse size
- Cost-effective self-assembly or, on request, full or supervised assembly service

		Door  Double door: 2000x2200mm				
SBH2600						
Width	(mm)	3100	4100	5100	6100	7100
Length	(mm)	4200 to 31500 (can be extended in modular 2100mm steps)				
Height	(mm)	2625				




ACCESSORIES/OPTIONS:

- [1](#)
- [2](#)
- [3](#)
- [4](#)
- [5](#)
- [6](#)
- [7](#)
- [9](#)
- [10](#)
- [11](#)
- [12](#)
- [13](#)
- [14](#)
- [15](#)

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Housing (➔ Page 41)
-  Storage Space (➔ Page 42)
-  Tyre Storage (➔ Page 42)
-  Self Storage (➔ Page 43)

Quick-Build-Warehouse SBH3000

Height 3.0m



OUR
BESTSELLER



ASSEMBLY IN JUST
A FEW HOURS
quick & easy



DIN EN1090-1:2012
REG.-NR. 0114502





SITUATION:

You are looking for a **variable warehouse** with extra headroom, which can be built with or without foundation and modularly expanded later.

SOLUTION: Quick-Build-Warehouse SBH3000

- Can be extended in length at any time in modular 2m steps
- Ground anchorage with ground nails
- Optional ground anchorage with dowels on foundation
- Verifiable structural analysis according to Eurocode 3 included
- Snow load safety of up to 400kg/m² depending on warehouse size
- Cost-effective self-assembly or, on request, full or supervised assembly service

		Roller shutter & door		Door	
Features:		 Roller shutter: 2600x2500mm Door: in side wall, single door, 1000x2200mm		 Door: double door, 2300x2400mm or 2600x2700mm	
SBH3000					
Width	(mm)	4100	5100	6100	7100
Length	(mm)	4100 to 30100 (can be extended in modular 2000mm steps)			
Height	(mm)	3025			




ACCESSORIES/OPTIONS:

- 5
- 6
- 7
- 9
- 12
- 13
- 14
- 15
- 16

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Housing (➔ Page 41)
-  Storage Space (➔ Page 42)
-  Tyre Storage (➔ Page 42)
-  Self Storage (➔ Page 43)

Quick-Build-Warehouse SBH4000

Height 4.0m



SPACIOUS



ASSEMBLY IN JUST
A FEW HOURS
quick & easy



DIN EN1090-1:2012
REG.-NR. 0114502





SITUATION:

You need a **spacious, flexible warehouse** for large space requirements which can be extended in the length at any time due to the modular construction.

SOLUTION: Quick-Build-Warehouse SBH4000

- Can be extended in length at any time in modular 2m steps
- Ground anchorage with dowels on foundation
- Verifiable structural analysis according to Eurocode 3 included
- Snow load safety of up to 220kg/m² depending on warehouse size
- Cost-effective self-assembly or, on request, full or supervised assembly service

		Roller shutter & door		Door			
		Features: <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Roller shutter: 3000x3000mm Door: in side wall, single door, 1000x2200mm</p> </div> <div style="text-align: center;">  <p>Door: double door, 2300x2400mm or 2600x2700mm</p> </div> </div>					
SBH4000							
Width	(mm)	4100 <small>(Gate and door measurements on request)</small>	5100	6100	7100		
Length	(mm)	4100 to 30100 (can be extended in modular 2000mm steps)					
Height	(mm)	4025					





ACCESSORIES/OPTIONS:

- [5](#)
- [6](#)
- [7](#)
- [9](#)
- [12](#)
- [13](#)
- [14](#)
- [15](#)
- [16](#)

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Housing (➔ Page 41)
-  Storage Space (➔ Page 42)
-  Tyre Storage (➔ Page 42)
-  Self Storage (➔ Page 43)

Quick-Build-Warehouse SBH4800

Height 4.8m



XXL WAREHOUSE



ASSEMBLY IN JUST
A FEW HOURS
quick & easy



DIN EN1090-1:2012
REG.-NR. 0114502





SITUATION:

You require an **uncompromisingly large warehouse or lorry garage**, which can be extended if necessary and easily be adapted to your growing needs.

SOLUTION: Quick-Build-Warehouse SBH4800

- Can be extended in length at any time in modular 2m steps
- Ground anchorage with dowels on foundation
- Verifiable structural analysis according to Eurocode 3 included
- Snow load safety of up to 220kg/m² depending on warehouse size
- Cost-effective self-assembly or, on request, full or supervised assembly service

		Features:		Roller shutter & door	Door
				 Roller shutter: 600x4000mm Door: In side wall, single door, 1000x2200mm	 Door: double door, 2300x2400mm or 2600x2700mm
SBH4800					
Width	(mm)	4100 (Gate and door measurements on request)	5100 (Gate and door measurements on request)	6100	7100
Length	(mm)	4100 to 30100 (can be extended in modular 2000mm steps)			
Height	(mm)	4825			








ACCESSORIES/OPTIONS:

- 5
- 6
- 7
- 9
- 12
- 13
- 14
- 15
- 16

➔ See page 44 – 45 for details.

FIELDS OF APPLICATION:

-  Building Sites (➔ Page 40)
-  Housing (➔ Page 41)
-  Storage Space (➔ Page 42)
-  Tyre Storage (➔ Page 42)
-  Self Storage (➔ Page 43)

FIELDS OF APPLICATION / REFERENCES

Containers and Warehouses



Building Sites

For safe storage of material and appliances on the building site. Highest stability for every day life in construction.



Building Site Container



Building Site Container



With 4 standard jack rings, up to 3 tons can be lifted by crane



Maintenance hangar



Housing

Machines, materials and people are superbly protected from environmental influences with BOS housing.



Gas pump housing



Power generator housing



Inlet pump housing



Housing for an external control centre

FIELDS OF APPLICATION / REFERENCES

Containers and Warehouses



Storage Space for industry, crafts and trade

Storage space at any time and any place- with highly flexible BOS storage containers and warehouses from 2 to 200m².



Extra storage at a DIY store



Material storage on the airport landing field



Tyre Storage

BOS tyre storage solutions are designed for the automobile trade as well as for the tyre trade.



Storage space for tyres ...



... individually upgradable with commercially available shelving systems



Self Storage

BOS storage boxes and warehouses are ideally suitable for Self Storage- inside and outside. Extra rental space is created with very little effort.



Self Storage Box



Self Storage space



Storage Management for construction, industry and trade

For the mobile or stationary storage of constantly required consumables (C-parts).



Storage of pressurised gas cylinders



Mobile storage space for diverse goods

ACCESSORIES/OPTIONS

Containers and Warehouses

Tidiness



1

Shelving system

3 levels, 1/2/3m lengths, 420mm depth. From galvanized steel, load bearing capacity of 50kg per shelf bracket. Self-supporting construction so that the whole floor surface can be used. Adjustable in height in 100mm steps.

Article no.: RS-3-1-420 (1m), RS-3-2-420 (2m), RS-3-3-420 (3m)



2

Tool rail

Slot-in, galvanized tool rail for spades, shovels, brooms etc.

Article no.: GL-C



3

Clothes rail

Slot-in, galvanized steel rail with 5 hooks for clothing, hats etc.

Article no.: KHL-C



4

Hose and cable suspension

Slot-in, galvanized steel half shell for garden hoses, cables etc.

Article no.: SKA

Security



5

Burglar protection

Retrofittable security system including padlock for BOS Containers/ Quick-Build-Warehouses from 2010 onwards.

Article no.:
EBS-1 (single door)
EBS-2 (double door)



6

Anti-theft security bar

Retrofittable security bar for single and double doors in solid steel with padlock.

Article no.:
DSV-1-W (single door)
DSV-2 (double door)



7

Anti-condensation coating

The pre-applied coating on the underside of the roof absorbs humidity protecting stock effectively from condensation.

Article no.: AKW



8

Protective corner covers

Corner covers provide additional theft and collision protection as well as increased stability.

Article no.: LT ZSE-2100
(per piece)

ACCESSORIES/OPTIONS

Containers and Warehouses

Comfort



9 Exterior painting
Finish with 2K layer thickness, hardwearing, decorative, light and weather resistant. Available in all RAL colours.

Article no.: AL



10 Access ramp
Suitable for single and double doors. Made of non-slip aluminium-duet-sheeting. 870x1460mm, load 250kg.

Article no.: AFR-920



11 Electrical package
Robusta
Hang up electrical package, comprising light (11W/220V) and 2 plug socket, on/off switch, 5m connection cable with fuse box. Installation by customer.
On request.



12 Light panel in the roof
A light panel in the roof provides light without using electricity (for containers 1x2m, for warehouses 2x2m).

Article no.: DLD-1x2

Article no.: DLD-2x2



13 Sliding window in high grade plastic
Sliding window (750 x 850mm) with single glazing and interior lock (as burglar protection) and shutters with magnetic catches (for securing when open).

Article no.: SFG



14 Additional side entrance door
Galvanized single steel door, 950x2200mm (WxHt).

Article no.: NET-1,0x2,2



15 Double door
Galvanized double door with lock and profile cylinder, with vertical bolt for security.

1550x2200mm, Art. no. NET-1,5x2,2
1950x2200mm, Art. no. NET-2,0x2,2
2350x2400mm, Art. no. NET-2,3x2,4
2650x2700mm, Art. no. NET-2,6x2,7



16 Additional roller shutter
Measurements on request.

COMPETENCE AND KNOW-HOW

As the market leader, BOS Best Of Steel is constantly working on the improvement of solid material storage that is light to transport, quick to be put into use and capable of expansion. This offers a storage facility with sturdy all round protection and a good cost-benefit ratio. Our aim is always to offer the most simple and suitable solution for the most diverse areas of use.

Proven Best-Point technology – the material surface remains undamaged

At BOS only galvanized fine sheet steel is used. Building components are joined together using a unique connecting technology.

In contrast to conventional production methods, the protective zinc coating is not damaged.

A 10 year anti-corrosion guarantee is given on the Best-Point joints.

In our business field 'Steel Frames' we have been producing door frames in steel for 50 years – repeatedly awarded for outstanding design: www.BestOfSteel.de



BOS

Best Of Steel

BOS GmbH Best Of Steel

Lütkenfelde 4, D- 48282 Emsdetten

Phone: +49 (0)2572 203-170

Fax: +49 (0)2572 203-179

E-Mail: Container@BestOfSteel.de

Web: www.Container-BestOfSteel.de



Quality




Environment



Safety



Energy



www.gerbercom.de | January 2018
Subject to change | DSWE0224

